

AUTARK K2 SMALL SECONDS


USER MANUAL



HORAGE

Dear Customer,
Congratulations on your new HORAGE Autark K2 Small Seconds,
we hope it brings you much joy in the years to come.

Please be sure to review the “Important Information” and “Operation Instructions”
listed below prior to using your Autark K2 Small Seconds.

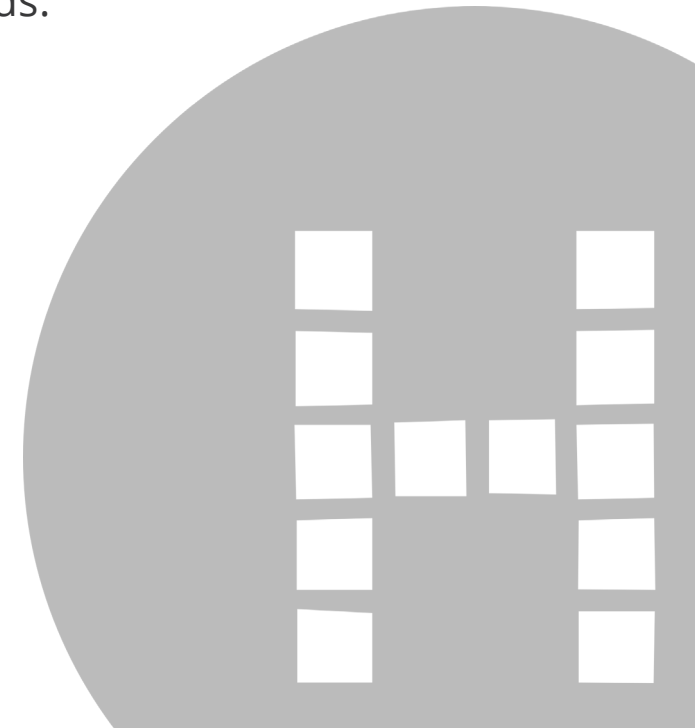

IMPORTANT INFORMATION

Attention: To guarantee the reliability of your HORAGE watch, we have created a short list of recommendations for you.

Your Autark K2 Small Seconds has a K2 automatic Micro-Rotor movement. This means it will rewind the mainspring whist being worn on the wrist, or when mounted in a watch winder. If the watch has not been worn for a period and is not running, you should apply a few winds manually before it will start to run. You can manually wind via the crown.

- If the watch is not running, the first step you should take is to wind the movement by turning the crown approximately 30 times in a clockwise direction.
- The energy from winding the watch is stored in the main spring located in the main barrel, and this reserve of energy is referred to as the power reserve.
- The Autark K2 Small Seconds has a power reserve of over 3 days or 72 hours. A fully wound watch may run slightly longer than 3 days if not worn, however, the amplitude or consistency of the energy will reduce after 3 days and therefore the precision of the watch could be impacted.



USEFUL INFORMATION

- The accuracy of the Autark K2 Small Seconds is calculated within a 3-day operating timeframe and therefore to ensure your watch remains precise please be sure to wear or manually wind the watch on or before the 3rd day prior to it last being worn or wound.
- Although the K2 movement utilises a silicon escapement that performs well in everyday magnetic fields. Very strong magnetic forces can negatively impact any mechanical watch's performance.
- We recommend that you keep your Autark K2 Small Seconds away from magnets, batteries, or devices that emit strong magnetic fields.
- The Autark K2 Small Seconds is very reliable; however, as a precision mechanical watch with many moving parts, impacts such as dropping the watch should be avoided.
- To ensure your watch remains water-resistant to the maximum water pressure designated on the watch case, always return the watch crown to the fully pushed-in position before wearing or being exposed to water.
- Water resistance can be affected over time by impact shocks, and chemical reactions with substances such as gasoline, adhesives, paints, cleaning sprays, etc.




USEFUL INFORMATION

- Excessive, continued turning of the crown can reduce the longevity of seals used for water resistance. If you frequently take your watch in the water, it is recommended to have its water resistance checked by a competent watch service centre every three years.
- From time to time, you may feel a desire to clean your watch. Before doing so, please remove the leather strap (if fitted) as outlined in the operating instructions.
- Ideally, use a small plastic or rubber bowl and fill it with warm water and some gentle hand washing soap. Before placing the watch case in the warm water, be sure to check that the crown is in the pushed-in and closed position.
- Using a soft cotton cloth, you can gently clean the case. Once finished, rinse the case with fresh water and pat dry with a dry, soft cotton towel. Afterwards, buff with a microfibre hand towel.



OVERVIEW

- 1 Hour Hand
- 2 Minute Hand
- 3 Small Seconds indication
- 4 Adjustment Crown

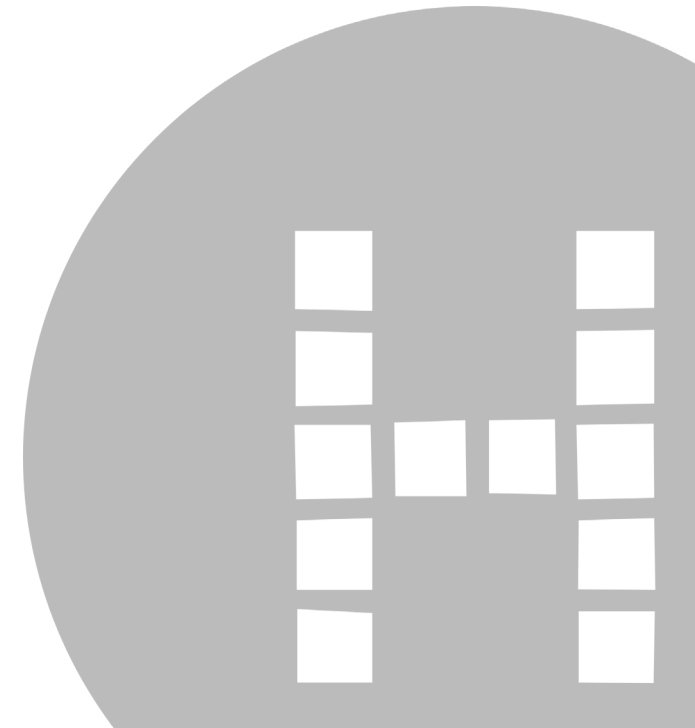





Position 0: Crown in Pushed Home Position

- The crown is completely against the case and a properly maintained watch will be water resistant to the depth noted on the case back when the crown is in this position.





Position 0: Winding Position

- In this position, you can wind the watch manually by turning the crown clockwise.
- Continuously turn the crown 30 or more full rotations to ensure adequate power reserve.
- You cannot overwind the watch. The watch will also wind itself with each movement on your wrist when worn.





Position 1: Setting The Time

- **1** • With the crown pulled outwards to the first notch also referred to as the first position turn the crown clockwise to set the Hour and Minute Hands correctly. The Small Seconds Hand will stop running when the crown is pulled to position 1. This is also known as 'hacking'
- When finished with time setting be sure to push in the crown to position 0 to ensure water resistance.



AUTARK K2 SMALL SECONDS
K2 MICRO ROTOR



HORAGE SA Factory 1
Solothurnstrasse 1, 2504 Biel, Switzerland
www.horage.com

HORAGE